



NESTO KG
Gabrovski-Str.81B
Zapadna promichlena zona
5000 V.Tarnovo, Bulgarien
Tel. 00359/ 62/ 623536
00359/ 62/601372
office@nesto.bg

QUOTATION

VEMAG MINCED MEAT LINE





The line include:

VACUUM FILLER VEMAG HP17 C



Continuous vacuum filler for straight filling and portioning

- Machine features:

- All-in-one 350 l hopper with counter arm and reinforced scraper, tipping aid and hopper lock
- Hopper inlet 100 mm diameter
- Integrated vacuum pump
- Double screw
- Standard double screw housing

Control: PC



program memory for 99 filling programs,

Portion weight: from 5 up to 60 000 g

VEMAG DuoDrive with separate drive for double screw and feed:
double screw drive

Machine dimensions in cm:

Width: 140,0

Length: 245,0

Height: 218,0


Power: 24,0 kW

Voltage: 380 V, 50 Hz

Weight: 1300 kg

VEMAG lifting and tipping device for HPC with 250 l hopper
- To fit standard trolley, 200 l capacity


VEMAG grinder 982 - 130 mm Ø - for HP

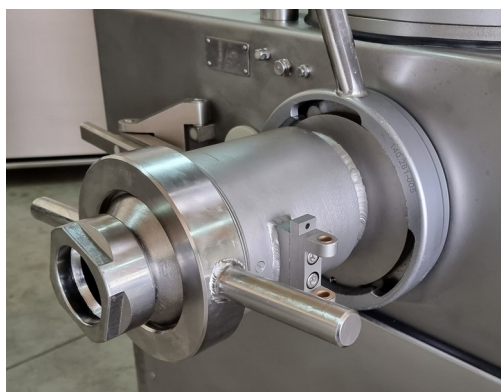

- With a hinge connection
- For grinding and filling simultaneously

- Prepared for separating, but without separating device
- Consisting of:
 - grinder housing
 - Disassembly device
 - Polygonal shaft to drive the grinder set by special double screw, but without double screw
 - Standard blade set parts (sequence in direction of filling):
 - Pre-breaker
 - Ring knife "1"
 - 7.8 mm hole plate,
 - Ring knife "2"
 - Final hole plate

MINCED MEAT ATTACHMENT 801

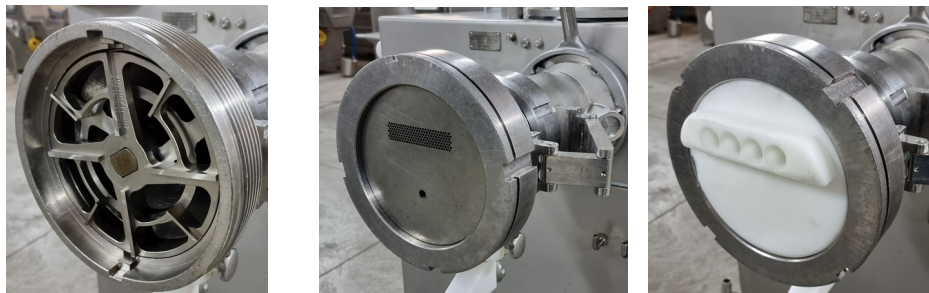

VEMAG minced meat attachment type 801

- For hole plates \varnothing 200 mm
- For attaching to grinder 982
- Standard blade set parts (sequence in direction of filling):
 - Pre-breaker \varnothing 200 mm
 - Ring knife 3/6
 - Forming hole plate of your choice for minced meat and cevapcici

VEMAG MINCED MEAT PORTIONER MMP 220



VEMAG minced meat portioner type MMP 220

- For portioning products discharged in a strand (e.g. ground beef) in accurate weights

- Only in conjunction with HPE and with minced meat grinder type 801/982
 - Two synchronized conveyor belts (feed and discharge belt) 250 mm wide, speed infinitely adjustable
 - Special blade on pneumatically-driven guillotine between the conveyor belts
 - Paper feed for endless paper with a maximum roll width of 240 mm
 - Paper roll brake to prevent paper flow in start-stop operation
 - Automatic positioning under the product and cutting to size with the product for product widths up to 240 mm
 - Portioning rate: up to 120 port./min. with 500 g portions
 - Nominal output, total: 1.2 KW
-