

QUOTATION

Deep-drawing vacuum-packing machine MULTIVAC R 230



1. Specification

Formats	:	2x2 or 2x1
Length of drawing	:	276 mm
Depths of drawing	:	55 mm
packing	:	rigid film
bottom film	:	422 mm (+4/+2 mm)
Top film	:	417 mm (+1/-1 mm)
Productivity	:	6 – 8 tacts
Dosage	:	no
Gas	:	yes
Voltage	:	3 ph 400V /50Hz, N, I=15 A P= 13 kW
Compressed air	:	min. 6 bar

Supplying pipeline 1"

Water	:	100-150 liters/hour, 15° C max	½" input
Work-shop	:	air-conditioned	

2. Parameters

Machine

- Length 7300mm
- Width 1100mm
- Height 2100mm
- Tools distance - 2200mm
- 2 x 4- point lifting system
- Transport chain made of stainless steel
- Forming and vacuum systems
- Unrolling systems for top and bottom films
- Electrical and pneumatic control
- Servicing buttons
- safety circuit-breakers for water and compressed air
- magnet circuit-breakers for protective covers
- With venting system
- protective devices according current standards

3. Accessories

1 section for longitudinal cutting with rotating knives

Knife shafts with rotating knives

2 section for tranverse cutting

2 devices for draining out of the wasting stripes

For rigid films

1 taking-out band

4: Pumps

1 vacuum pump 200 m³ - not included

5: Tools

Vario-tools

Base tool

- Film width 422 mm
- Length of drawing 276 mm
- Max.depth of drawing 55 mm
- Appropriate for rigid films


Vario 1

2 bands, 2 row, = 2 packings/tact

Packing dimensions :

Form dimensions : L x B = 175.0 x 122.0 mm

Outside dimensions : L x B = 190.0 x 138.0 mm

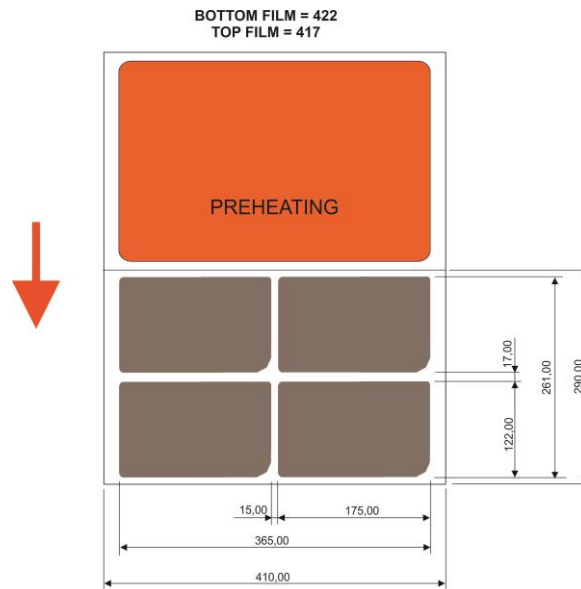

Or Vario 2

2 bands, 1 row, = 2 packings/tact

Packing dimensions :

Form dimensions : L x B = 261.0 x 175.0 mm

Outside dimensions : L x B = 275.5 x 190.0 mm

