



Gabrovski-Str.81B  
Zapadna promichlena zona  
5000 V.Tarnovo, Bulgarien  
Tel. 00359/ 62/ 623536  
00359/ 62/601372  
[office@nesto.bg](mailto:office@nesto.bg)

## QUOTATION

### TRAYSEALER SEALPAC 800



- Very compact construction
- High flexibility in terms of service and cleaning:
  - \* Machine can be operated from all sides
  - \* Fast and easy cleaning of the tool
  - \* Short time for retrofitting

### **Technical specifications SEALPAC 800**

Type: 800

Capacity: up to max. 10-12 cycles /min.

Number of trays per cycle: 5

Connection : 3X400/230V+N+E – Max. 10,0 KW


Air consumption : 8 Bar - 650 L/min

Vacuum pump : not included;

Vacuum consumption : depending on the product weight  
approx.250-300 m<sup>3</sup> /h.

Water consumption : using a closed system is recommended

Gas consumption : only when performing vacuum / gas, depending on the size of the trays, dimensions of the tool, the product and the desired speed

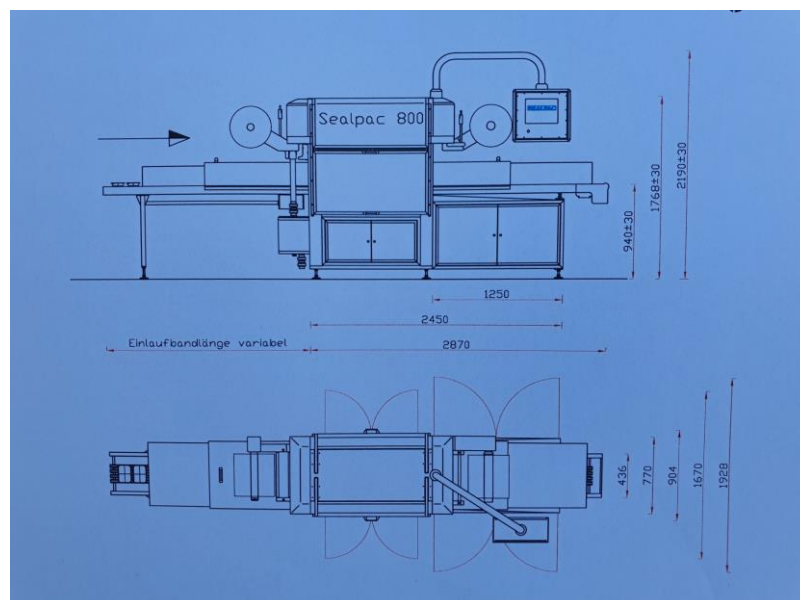

### **Specification Product/ Packaging**

Product	:	fresh chilled meat
Packaging	:	molded trays
Trays material	:	all materials, susceptible to sealing (artificial materials, aluminum, cardboard)
Trays dimensions	:	190 x 144
Top film	:	all materials, susceptible to sealing

### **General requirements for the trays.**

- Film and trays to be sealed well, especially in combination
- Trays to be stable in size and shape
- Width of sealed edge min. 5 mm

Machine dimensions :

Length – L=8 500mm

Width - B= 950mm

Height- H=2100mm