


## QUOTATION VACUUM FILLING MACHINE



### VEMAG DP 15C type 154

- Continuous vacuum filler for straight filling and portioning
- Filling mechanism: with rotary vane pump with 12 sliding rules, standard

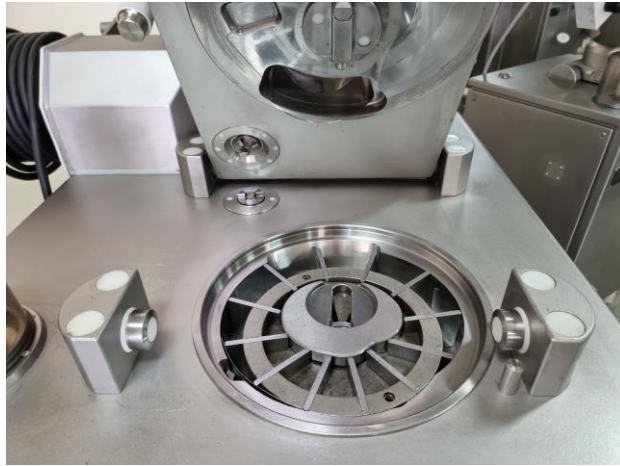

- Hopper approx. 350 liters, with loading screw, dismantable, with limiter
- Built-in vacuum pump debit 20 cm<sup>3</sup> /hour and circulation greasing
- Built-in portioning computer PC



- Portion weight: 5 – 60.000 gr
- Adjustable clips-impulse
- Adjustable reverse suction
- Adjustable portion intervals between 50 – 6000 msec
- Adjustable twist time between 50 – 6000 msec
- Filling speed: 0 – 100 % depending on type of the wrapper and portion size
- Steplessly adjustable filling speed
- Filling capacity max. 10 000 kg/h

## 1 VEMAG lifting device

- Built-in
- Hydraulic leading
- access also from back side
- arm Nirosta for standard trolley according to DIN 9797, 200 liters volume

Machine dimensions in cm:

Width:	130,0
Length:	220,0
Height:	200,0
Installed power:	24,0 kW
Voltage	400 V, 50/60 Hz
Weight:	approx 1 330 kg